

Technical data sheet

MCR protection for 2-pole for power supply, 110 V

Item number: 5097631



Surge protective device/fine protection type 3 to EN 61643-11

- Suitable for DC and AC voltage systems
- With visual function display
- With installation-friendly, screwless connection terminals
- In a space-saving 17.5 mm grid
- Y circuit


Application: Universal use on 35 mm DIN profile rail in every normal commercially available distributor housing.



Master data

Item number	5097631
Type	VF110-AC DC
Description 1	Lightning barrier
Description 2	for AC and DC
Manufacturer	OBO
Dimension	110V AC
Smallest sales unit	1
Unit of quantity	Piece
Weight	8 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,4043 kg CO2e / 1 Piece

Dimensions

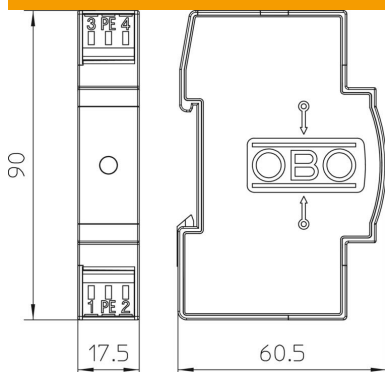

Technical data sheet

MCR protection for 2-pole for power supply, 110 V

Item number: 5097631



Technical data

	Response time	<25 ns
	Blow-out	no
	Version for	110 V version
	Pole version	2
	Structural width in division units (division unit, 17.5 mm)	1
	Operating temperature, max.	80 °C
	Operating temperature, min.	-40 °C
	Explosion-tested version	no
	Remote signalling	no
	Maximum continuous voltage AC	150 V
	Maximum continuous voltage DC	200 V
	Conductor cross-section, rigid (single-wire/multiwire), max.	2.5 mm ²
	Conductor cross-section, rigid (single-wire/multiwire), min.	0.14 mm ²
	Lightning protection zone LPZ	2→3
	Max. mains-side overcurrent protection	20
	Maximum back-up fuse	20 A
	Maximum discharge current (8/20 µs)	6.5 kA
	Installation type	DIN rail 35 mm
	Nominal discharge current (8/20 µs)	2 kA
	Nominal voltage AC (50/60 Hz)	110 V
	Network form	Other
	OBO_Nominal load current (input/output terminal)	20 A
	Pole number	3
	Test class, type 3	yes
	Protection rating	IP20
	Protection level	≤0,5 kV
	Protection level wire-wire	<500 V
	Protection level wire-earth	<1400 V
	Signalling on device	Visual
	SPD to EN 61643-11	Type 3
	SPD to IEC 61643-1	Class III
	Permitted temperature range, max.	80 °C
	Permitted temperature range, min.	-40 °C