

# Technical data sheet

## SurgeController V20, plug-in arrester 280 V



Item number: 5099609



Surge arrester, type 2

- Plug-in arrester, can be separated from base without tools
- Including thermal and dynamic separating device and visual status display
- High current conductivity and long service life



### Master data

Item number	5099609
Type	V20-C 0-280
Description 1	SurgeController V20
Description 2	plug-in arrester
Manufacturer	OBO
Dimension	280V
Smallest sales unit	1
Unit of quantity	Piece
Weight	8.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1668 kg CO2e / 1 Piece


# Technical data sheet

## SurgeController V20, plug-in arrester 280 V



Item number: 5099609

### Dimensions

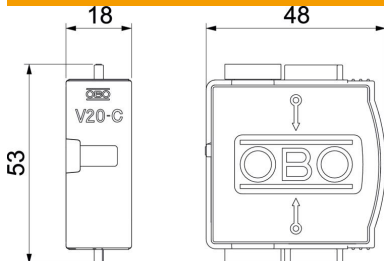

### Technical data

Arrester surge current (8/20 $\mu$ s) [total]	20 kA
Response time	<25 ns
Blow-out	no
Version for	1-pin cover; 280 V
Pole version	1
Structural width in division units (division unit, 17.5 mm)	1
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	no
Maximum continuous voltage AC	280 V
Maximum continuous voltage DC	350 V
Integrated back-up fuse	no
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm <sup>2</sup>
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm <sup>2</sup>
Lightning protection zone LPZ	1→2
Max. mains-side overcurrent protection	125
Maximum back-up fuse	125 A
Maximum discharge current (8/20 $\mu$ s)	40 kA
Installation type	On basic element
Nominal discharge current (8/20 $\mu$ s)	20 kA
Nominal discharge current (8/20 $\mu$ s) [L-N]	20 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	TN
Test class, type 2	yes
Protection rating	IP20
Protection level	$\leq 1,3$ kV
Signalling on device	Visual
SPD to EN 61643-11	Type 2
SPD to IEC 61643-1	Class II
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C