

# Technical data sheet

## Surge arrester, 2-pole 280 V



Item number: 5094621



Surge arrester, type 2

- For surge protection equipotential bonding to VDE 0100-443 (IEC 60364-4-44)
- Arresting capacity to 40 kA (8/20) per pole
- Plug-in arrester with dynamic cut-off unit and visual function display
- High-performance varistor technology


Application: Equipotential bonding (LPZ 1 to 2) in main and sub-distributors.  
\* Complete = cover and base



### Master data

Item number	5094621
Type	V20-C 2-280
Description 1	SurgeController V20
Description 2	two-pole design
Manufacturer	OBO
Dimension	280V
Smallest sales unit	1
Unit of quantity	Piece
Weight	22.7 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,8991 kg CO2e / 1 Piece

### Dimensions

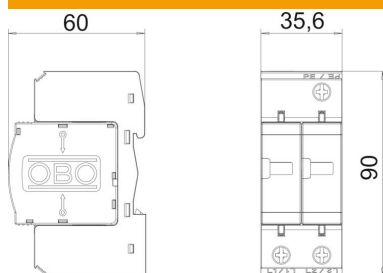

# Technical data sheet

## Surge arrester, 2-pole 280 V

Item number: 5094621



### Technical data

Arrester surge current (8/20 µs) [total]	40 kA
Response time	<25 ns
Blow-out	no
Version for	2-pole
Pole version	2
Structural width in division units (division unit, 17.5 mm)	2
Operating temperature, max.	80 °C
Operating temperature, min.	-40 °C
Remote signalling	no
Maximum continuous voltage AC	280 V
Integrated back-up fuse	no
Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm <sup>2</sup>
Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm <sup>2</sup>
Lightning protection zone LPZ	1→2
Max. mains-side overcurrent protection	125
Maximum back-up fuse	125 A
Maximum discharge current (8/20 µs)	40 kA
Installation type	DIN rail 35 mm
Nominal discharge current (8/20 µs)	20 kA
Nominal voltage AC (50/60 Hz)	230 V
Network form	TN
Test class, type 2	yes
Protection rating	IP20
Protection level	≤1,3 kV
Signalling on device	Visual
SPD to EN 61643-11	Type 2
SPD to IEC 61643-1	Class II
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C