

Technical data sheet

Surge arrester, 4-pole 550 V



Item number: 5094718



Surge arrester, type 2

- For surge protection equipotential bonding to VDE 0100-443 (IEC 60364-4-44)
- Arresting capacity to 40 kA (8/20) per pole
- Plug-in arrester with dynamic cut-off unit and visual function display
- High-performance varistor technology


Application: Equipotential bonding (LPZ 1 to 2) in main and sub-distributors.
* Complete = cover and base



Master data

Item number	5094718
Type	V20-C 4-550
Description 1	SurgeController V20
Description 2	4-pole design
Manufacturer	OBO
Dimension	550V
Smallest sales unit	1
Unit of quantity	Piece
Weight	45.5 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,719 kg CO2e / 1 Piece

Dimensions

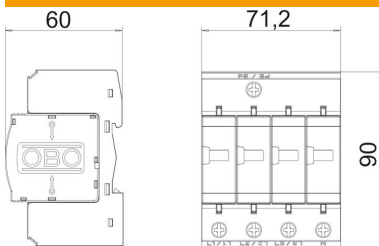


Technical data sheet

Surge arrester, 4-pole 550 V



Item number: 5094718

Technical data

	Arrester surge current (8/20 µs) [total]	60 kA
	Response time	<25 ns
	Blow-out	no
	Version for	4-pole
	Pole version	4
	Structural width in division units (division unit, 17.5 mm)	4
	Operating temperature, max.	80 °C
	Operating temperature, min.	-40 °C
	Remote signalling	no
	Maximum continuous voltage AC	550 V
	Integrated back-up fuse	no
	Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
	Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
	Lightning protection zone LPZ	1→2
	Max. mains-side overcurrent protection	125
	Maximum back-up fuse	125 A
	Maximum discharge current (8/20 µs)	40 kA
	Installation type	DIN rail 35 mm
	Nominal discharge current (8/20 µs)	15 kA
	Nominal voltage AC (50/60 Hz)	500 V
	Network form	TN
	Test class, type 2	yes
	Protection rating	IP20
	Protection level	≤2,4 kV
Signalling on device	Visual	
SPD to EN 61643-11	Type 2	
SPD to IEC 61643-1	Class II	
Permitted temperature range, max.	80 °C	
Permitted temperature range, min.	-40 °C	