

Technical data sheet

Lightning current and surge arrester, 1-pole + NPE with remote signalling

Item number: 5093661



Combination arrester, lightning and surge arrester type 1+2 to DIN EN 61643-11.

- For lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity 12.5 kA (10/350) per pole
- Universally suitable for TN and TT systems
- With Multibase base with multi-connection terminals
- Complete unit, consisting of upper part and base, pre-mounted and ready for connection
- Arrester, connectable with dynamic cut-off unit
- With visual function display
- Protection level < 1.3
- Encapsulated, non-extinguishing zinc oxide varistor arrester for use in distributor housings
- Labelled connections
- FS variant with remote signalling contact (potential-free NO contact)

Application: Equipotential bonding in buildings, even those with external lightning protection of Class III and IV, and in standard distributor housings.


* Complete = Plug-in arrester and base



Master data

Item number	5093661
Type	V50-B+C 1+NPE+FS
Description 1	CombiController V50
Description 2	1-pole + NPE w. remote signal
Manufacturer	OBO
Dimension	280V
Smallest sales unit	1
Unit of quantity	Piece
Weight	26.1 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,1123 kg CO2e / 1 Piece

Dimensions

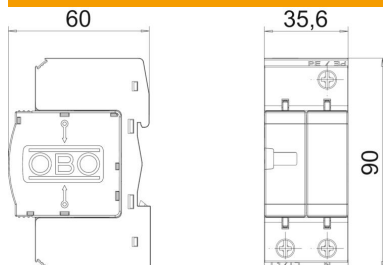

Technical data sheet

Lightning current and surge arrester, 1-pole + NPE with remote signalling

Item number: 5093661



Technical data

	Arrester surge current (8/20 µs) [total]	50 kA
	Response time	<25 ns
	Blow-out	no
	Version for	1+NPE + FS
	Pole version	1+N/PE
	Structural width in division units (division unit, 17.5 mm)	2
	Operating temperature, max.	80 °C
	Operating temperature, min.	-40 °C
	Lightning surge current (10/350 µs)	12.5 kA
	Lightning surge current (10/350 µs) [N/PE]	25 kA
	Lightning surge current (10/350 µs)	25 kA
	Remote signalling	yes
	Maximum continuous voltage (N-PE)	255 V
	Maximum continuous voltage AC	280 V
	Integrated back-up fuse	no
	Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm ²
	Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm ²
	Lightning protection zone LPZ	0→2
	Max. mains-side overcurrent protection	125
	Maximum back-up fuse	125 A
	Maximum discharge current (8/20 µs)	50 kA
	Installation type	DIN rail 35 mm
	Nominal discharge current (8/20 µs)	30 kA
	Nominal discharge current (8/20 µs) [L-N]	30 kA
	Nominal discharge current (8/20 µs) [N-PE]	50 kA
	Nominal voltage AC (50/60 Hz)	230 V
	Network form	Other
	DC network form	no
	IT network form	no
	Other network form	no
	TN network form	yes
	TN-C network form	no
	TN-C-S network form	yes
	TN-S network form	yes
	TT network form	yes
	Pole number	1
	Protection rating	IP20
	Protection level	≤1,3 kV
	Protection level [L-N]	≤1,3
	Protection level [N-PE]	1.2 kV
	Signalling on device	Visual
	SPD to EN 61643-11	Type 1+2
	SPD to IEC 61643-1	Class I+II


Technical data sheet

Lightning current and surge arrester, 1-pole + NPE with remote signalling

Item number: 5093661



Technical data



Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-40 °C